



# Armourlay® Tropical 45/60 BP03 & 03A

## Overbanding, Crack Repair & Kerb Sealing



### MATERIAL DATA SHEET Latest Revision - December 2021

1/3

#### 1. GENERAL DESCRIPTION:

A micro textured skid resistant crack sealing system for use on concrete and asphalt pavements. The **Armourseal** range of hot applied overbanding systems are general purpose crack sealing systems which in service achieve minimum SRV values of  $\geq 45$  and  $\geq 60$  respectively.

#### 2. PRODUCT:

**Armourlay Tropical OBS 45 & 60** Grades are polymer modified bituminous crack repair materials which are designed to achieve SRV values of  $\geq 45$  and  $\geq 60$  respectively. The products are formulated to resist trafficking and deformation in temperate climates and are suitable for application on all types of asphalt and concrete surfacing.

##### USES:

- Overbanding & Crack Sealing Repairs
- Kerb Sealing Work

##### ADVANTAGES

- Fast and effective, minimises traffic disruption
- Highly ductile, prevents further deterioration
- Increases pavements serviceable life
- Easy to install and cost effective

#### 3. PHYSICAL PROPERTIES:

<b>APPEARANCE:</b>		Black Plastic Solid
<b>MINIMUM APPLICATION TEMPERATURE:</b>		+ 3°C
<b>PRODUCT POURING TEMPERATURE:</b>		180 ± 10°C
<b>MAXIMUM SAFE HEATING TEMPERATURE:</b>		200°C
<b>PENETRATION VALUE -</b>	<b>EN 13880-3:</b>	25 ± 10 dmm
<b>FLOW RESISTANCE -</b>	<b>EN 13880-5:</b>	≤ 5mm
<b>SOFTENING POINT -</b>	<b>EN 1427:</b>	100 ± 15°C
<b>FLASH POINT - COC °C:</b>		≥ 250°C
<b>SPECIFIC GRAVITY RANGE -</b>	<b>EN13880-1:</b>	1.4 -1.8 ± 0.05

#### 4. CHEMICAL RESISTANCE:

Bituminous products soften in contact with petroleum solvent and mineral oils. The product has good resistance to dilute acids and alkalis.

**STORAGE:** Store in a cool dry place preferably under cover and away from direct sunlight.

**COMPOSITION:** A polymer modified bituminous compound containing aggregate (OBS60) and adhesion agents.



# Armourlay® Tropical 45/60 BP03 & 03A

## Overbanding, Crack Repair & Kerb Sealing



### MATERIAL DATA SHEET Latest Revision - December 2021

2/3

**PACKAGING:** Silicone or Poly-silicone lined sacks – 20 / 25Kgs Net.

#### 5. SAFE HANDLING PRECAUTIONS:

- \* Do not exceed the maximum safe heating temperature.
- \* Do not allow the hot material to come into contact with water as the product will react violently.
- \* Always wear the recommended protective clothing - see below.

#### 6. ACUTE HEALTH HAZARDS & ADVICE:

**Armourlay** presents no acute health hazard at ambient temperature. However, as these materials are normally handled at elevated temperatures when their physical state changes to a liquid, the bitumens present in these products give off fumes which are undesirable to inhale as very small quantities of **HYDROGEN SULPHIDE** may be present in the bitumen.

##### RECOMMENDED PROTECTIVE CLOTHING:

High Visibility Jacket, Hard Safety Helmet, Overalls, Goggles/Visor, Armlet Gloves and Closed Safety Boots **AT ALL TIMES** when handling hot product.

##### INHALATION:

Inhalation of the vapours should be avoided.

##### INHALATION FIRST AID:

Remove the affected person to fresh air. If breathing has stopped administer artificial respiration. Give cardiac massage if necessary. If the person is breathing but unconscious place in the recovery position. Obtain medical assistance immediately.

##### SKIN CONTACT:

Bituminous products present no acute health hazards to the skin other than burning when handling at elevated temperatures.

##### SKIN CONTACT FIRST AID:

Flush the contaminated skin with cold water. DO NOT ATTEMPT TO REMOVE THE BITUMEN. Cover the burn with a sterile dressing. Do not apply any medication to the affected part. Obtain medical attention immediately.

##### EYE CONTACT:

Contact with fumes may cause irritation and redness.

Manufactures & Suppliers of:  
Joint Sealants  
Bituminous Repair Compounds  
High Friction Surfacing  
Colour Coated Aggregates  
**The Complete Highway Service**

Walker Sealants Limited  
Manufacturing & Sales Division  
Outland Head  
Bradwell, Hope Valley  
Derbyshire, S33 9JP  
Tel: 01433 621 600



Directors: J.S. Walker, J.G.R. Walker  
Company Reg No. 4041871

A member of the Walker Group of Companies



# Armourlay® Tropical 45/60 BP03 & 03A

## Overbanding, Crack Repair & Kerb Sealing



### MATERIAL DATA SHEET Latest Revision - December 2021

3/3

**EYE CONTACT FIRST AID:**

Irrigate with copious amounts of water for 10/20 minutes and seek medical advice immediately.

**PRECAUTIONS:**



Avoid contact with the skin by use of suitable protective clothing.

**TRANSPORTATION:**

Not classified as dangerous for transportation.

**FURTHER INFORMATION:**

Additional information on the product is given in the system Safety Data Sheet and Installation Method Statement or by contacting Walker Sealants Ltd.

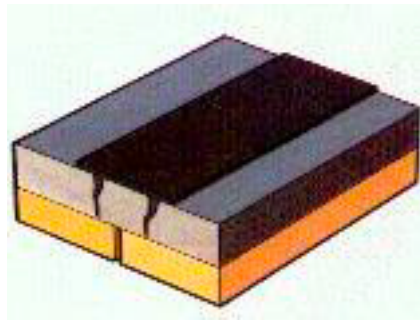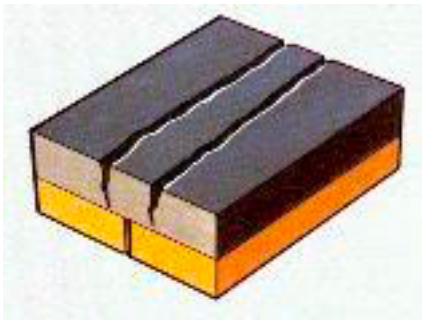

This data is provided for your information and your attention is drawn to the appropriate package labelling and the product safety data sheet. Users of the product must ensure its proper use in accordance with good industrial practices, proper medical advice and any official or Government notice or publication. This information is provided gratuitously independent of any sale of the product and does not form part of any contract or sale nor does it constitute any representation, warranty or condition of merchantability or fitness for any purpose.